
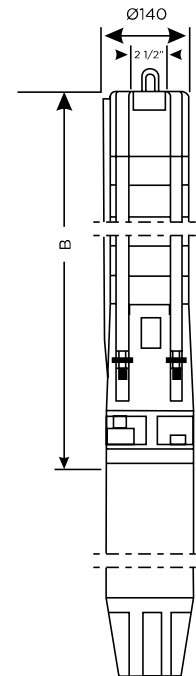
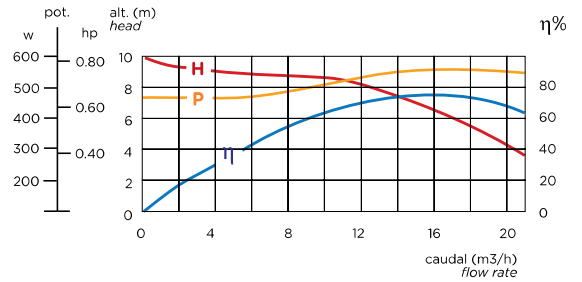


SX6 21

POMPE SOMMERSE 6"
6" SUBMERSIBLE BOREHOLE PUMPS
POMPES IMMERGÉES 6"
BOMBAS SUMERGIBLES 6"

50 Hz - n ≈ 2900 rpm

alt. (m)
head

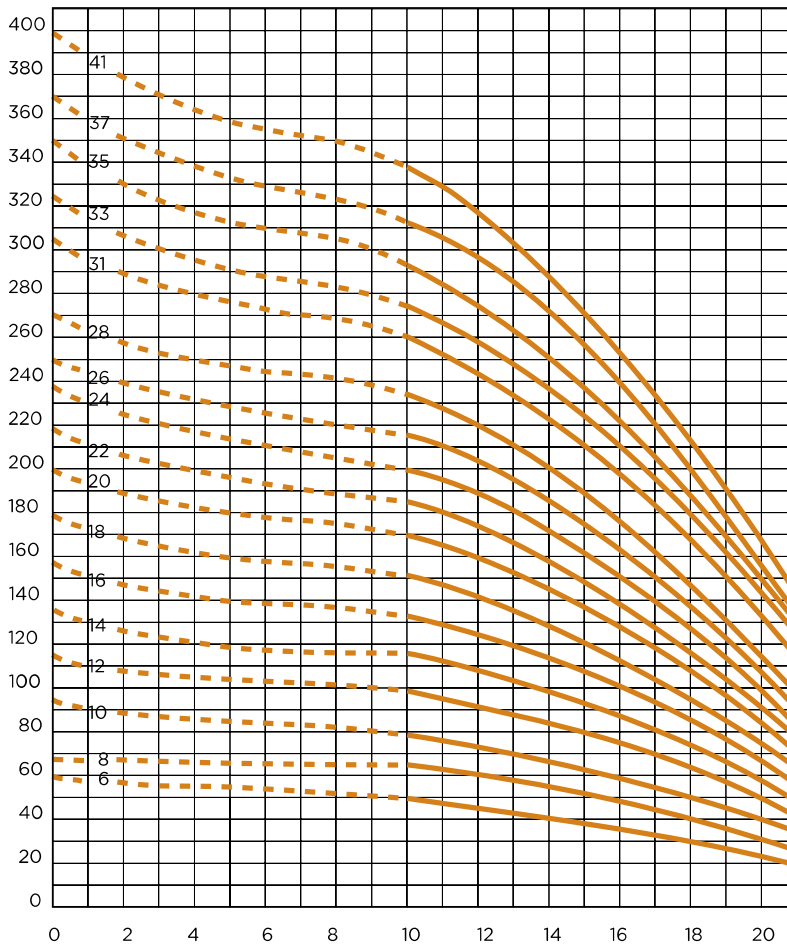

Pompe per applicazioni specifiche ad alto contenuto di sabbia. - Pumps for specific applications with high percentage of solids and sand
 Pompes pour applications spécifiques à haute teneur en solides et sable. - Bombas para aplicaciones específicas con un alto contenido de arena

| TIPO TYPE TYPE | MOTORE MOTOR MOTEUR | | Q m³/h l/min | PORTATA - DELIVERY - DEBIT - CAUDAL | | | | | | | | B (mm) | peso weight pump END | |
|----------------------|---------------------------|------|--|-------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----------|----------------------------|---------|
| | KW | CV | | 0 | 10 | 12 | 14 | 16 | 18 | 19 | 20 | | | 21 |
| SX6 21/6 | 3,7 | 5 | altura manométrica (M) total/head (m) | 59 | 49 | 45 | 40 | 35 | 29 | 26 | 21 | 19 | 515 | 10,2 kg |
| SX6 21/8 | 3,7 | 5 | | 67 | 64 | 60 | 54 | 48 | 40 | 35 | 30 | 25 | 605 | 12,5 kg |
| SX6 21/10 | 5,5 | 7,5 | | 93 | 79 | 73 | 67 | 58 | 49 | 45 | 39 | 34 | 695 | 14,7 kg |
| SX6 21/12 | 5,5 | 7,5 | | 115 | 98 | 91 | 83 | 74 | 61 | 54 | 50 | 41 | 808 | 17,6 kg |
| SX6 21/14 | 7,5 | 10 | | 135 | 114 | 108 | 99 | 87 | 72 | 65 | 56 | 48 | 897 | 19,8 kg |
| SX6 21/16 | 7,5 | 10 | | 157 | 132 | 124 | 113 | 100 | 84 | 75 | 65 | 55 | 988 | 22 kg |
| SX6 21/18 | 9,3 | 12,5 | | 179 | 150 | 140 | 128 | 111 | 92 | 84 | 72 | 63 | 1078 | 24,2 kg |
| SX6 21/20 | 9,3 | 12,5 | | 200 | 170 | 159 | 145 | 128 | 108 | 95 | 82 | 70 | 1168 | 26,4 kg |
| SX6 21/22 | 11 | 15 | | 219 | 185 | 173 | 157 | 138 | 115 | 102 | 90 | 77 | 1258 | 28,6 kg |
| SX6 21/24 | 11 | 15 | | 238 | 200 | 189 | 171 | 150 | 126 | 112 | 98 | 80 | 1348 | 30,9 kg |
| SX6 21/26 | 15 | 20 | | 250 | 215 | 204 | 185 | 160 | 135 | 120 | 105 | 90 | 1438 | 33,1 kg |
| SX6 21/28 | 15 | 20 | | 270 | 235 | 220 | 201 | 179 | 149 | 131 | 115 | 96 | 1528 | 35,3 kg |
| SX6 21/31 | 15 | 20 | | 305 | 260 | 245 | 222 | 196 | 166 | 150 | 131 | 115 | 1663 | 38,6 kg |
| SX6 21/33 | 15 | 20 | | 325 | 275 | 259 | 236 | 209 | 178 | 160 | 141 | 125 | 1753 | 40,8 kg |
| SX6 21/35 | 18,5 | 25 | | 350 | 294 | 274 | 250 | 220 | 188 | 170 | 150 | 130 | 1843 | 43 kg |
| SX6 21/37 | 18,5 | 25 | | 370 | 313 | 298 | 270 | 240 | 200 | 180 | 158 | 132 | 1933 | 45,2 kg |
| SX6 21/41 | 18,5 | 25 | 400 | 339 | 318 | 290 | 251 | 211 | 190 | 168 | 141 | 2113 | 49,6 kg | |

P₂ Potenza nominale motore
 Rated motor power output
 Puissance nominale du moteur
 Potencia nominal del motor

H Prevalenza totale in m
 Total head in m
 Hauteur totale en m
 Altura total en m




Tolleranze secondo ISO 9906, allegato A.
 Tolerances according to ISO 9906, annex A.
 Tolerancias según ISO 9906, anexo A.

Con riserva di modifiche
 Changes reserved
 Sous réserves de modifications
 Con reserva de modificaciones

SX6 35

POMPE SOMMERSE 6"
6" SUBMERSIBLE BOREHOLE PUMPS
POMPES IMMERGÉES 6"
BOMBAS SUMERGIBLES 6"

50 Hz - n ≈ 2900 rpm

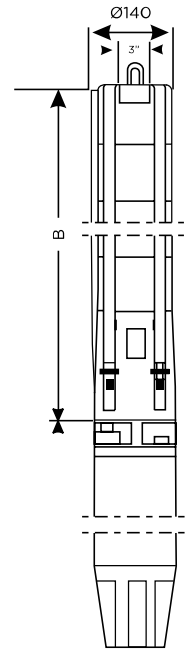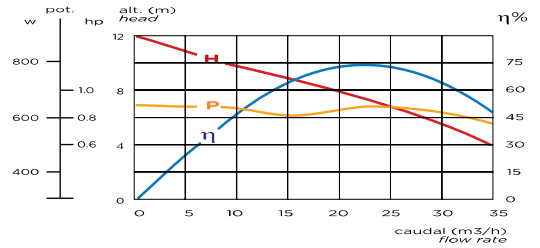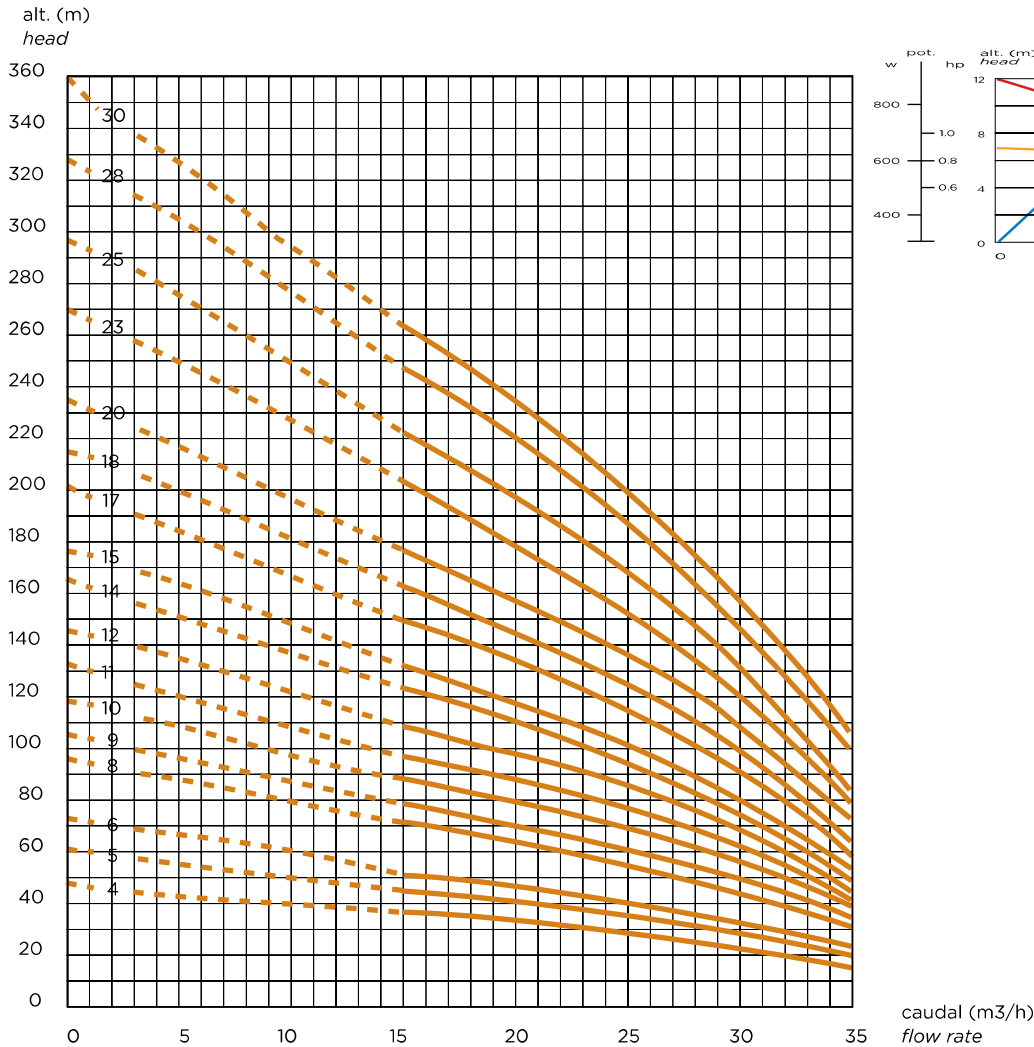

Pompe per applicazioni specifiche ad alto contenuto di sabbia. - Pumps for specific applications with high percentage of solids and sand
 Pompes pour applications spécifiques à haute teneur en solides et sable. - Bombas para aplicaciones específicas con un alto contenido de arena

| TIPO TYPE TYPE | MOTORE MOTOR MOTEUR | | Q m³/h l/min | PORTATA - DELIVERY - DEBIT - CAUDAL | | | | | | | | | | | | B (mm) | peso weight pump END |
|----------------------|---------------------------|------|--|-------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|-----------|-------------------------------|
| | KW | CV | | 0 | 15 | 17 | 19 | 21 | 23 | 25 | 27 | 29 | 31 | 33 | 35 | | |
| SX6 35/4 | 3,7 | 5 | altura manométrica (M) total head (m) | 48 | 37 | 35 | 34 | 32 | 30 | 29 | 25 | 24 | 20 | 18 | 15 | 605 | 10,8 kg |
| SX6 35/5 | 3,7 | 5 | | 61 | 45 | 43 | 41 | 40 | 38 | 36 | 33 | 30 | 27 | 22 | 19 | 695 | 12,5 kg |
| SX6 35/6 | 5,5 | 7,5 | | 72 | 51 | 49 | 48 | 46 | 43 | 40 | 37 | 33 | 30 | 27 | 23 | 785 | 14,2 kg |
| SX6 35/8 | 5,5 | 7,5 | | 96 | 71 | 69 | 65 | 61 | 59 | 54 | 50 | 46 | 40 | 38 | 30 | 988 | 18,7 kg |
| SX6 35/9 | 7,5 | 10 | | 105 | 79 | 75 | 71 | 69 | 65 | 60 | 57 | 51 | 47 | 40 | 34 | 1078 | 20,4 kg |
| SX6 35/10 | 7,5 | 10 | | 118 | 88 | 84 | 80 | 78 | 74 | 69 | 64 | 60 | 53 | 45 | 38 | 1168 | 22,34 kg |
| SX6 35/11 | 9,3 | 12,5 | | 131 | 97 | 93 | 90 | 86 | 80 | 77 | 70 | 65 | 58 | 50 | 40 | 1258 | 24 kg |
| SX6 35/12 | 9,3 | 12,5 | | 145 | 109 | 104 | 100 | 96 | 90 | 85 | 79 | 70 | 64 | 53 | 42 | 1349 | 25,6 kg |
| SX6 35/14 | 11 | 15 | | 165 | 123 | 119 | 113 | 108 | 100 | 94 | 86 | 78 | 69 | 59 | 49 | 1528 | 29 kg |
| SX6 35/15 | 11 | 15 | | 176 | 131 | 126 | 120 | 114 | 108 | 100 | 92 | 83 | 73 | 65 | 50 | 1618 | 30,8 kg |
| SX6 35/17 | 15 | 20 | | 201 | 150 | 143 | 138 | 130 | 122 | 115 | 106 | 96 | 85 | 71 | 56 | 1798 | 34,2 kg |
| SX6 35/18 | 15 | 20 | | 215 | 161 | 155 | 148 | 140 | 134 | 124 | 115 | 104 | 90 | 77 | 61 | 1888 | 36,2 kg |
| SX6 35/20 | 15 | 20 | | 234 | 176 | 169 | 160 | 152 | 145 | 137 | 127 | 115 | 100 | 85 | 72 | 2068 | 39,6 kg |
| SX6 35/23 | 18,5 | 25 | | 270 | 203 | 193 | 183 | 172 | 161 | 151 | 141 | 129 | 111 | 96 | 79 | 2338 | 44,7 kg |
| SX6 35/25 | 18,5 | 25 | | 297 | 221 | 210 | 200 | 190 | 180 | 170 | 155 | 140 | 120 | 101 | 82 | 2518 | 48,2 kg |
| SX6 35/28 | 22 | 30 | | 328 | 247 | 238 | 226 | 215 | 200 | 188 | 171 | 157 | 136 | 118 | 99 | 2788 | 53,3 kg |
| SX6 35/30 | 22 | 30 | 360 | 263 | 253 | 240 | 229 | 215 | 200 | 183 | 166 | 146 | 126 | 105 | 2968 | 56,7 kg | |

P₂ Potenza nominale motore
 Rated motor power output
 Puissance nominale du moteur
 Potencia nominal del motor

H Prevalenza totale in m
 Total head in m
 Hauteur totale en m
 Altura total en m

Tolleranze secondo ISO 9906, allegato A.
 Tolerances according to ISO 9906, annex A.
 Tolerancias según ISO 9906, anexo A.




Con riserva di modifiche
 Changes reserved
 Sous réserves de modifications
 Con reserva de modificaciones

SX6 60

POMPE SOMMERSE 6"
6" SUBMERSIBLE BOREHOLE PUMPS
POMPES IMMERGÉES 6"
BOMBAS SUMERGIBLES 6"

50 Hz - n ≈ 2900 rpm

alt. (m)
head

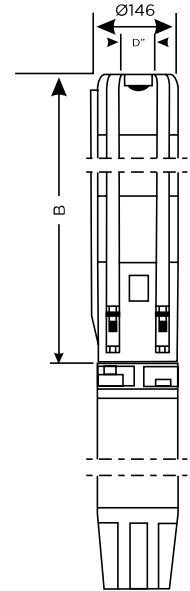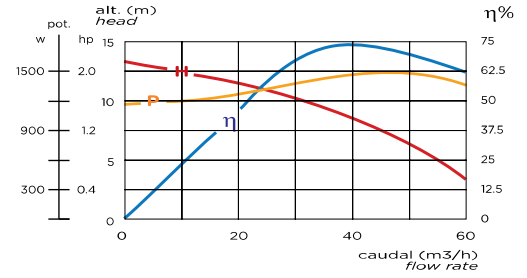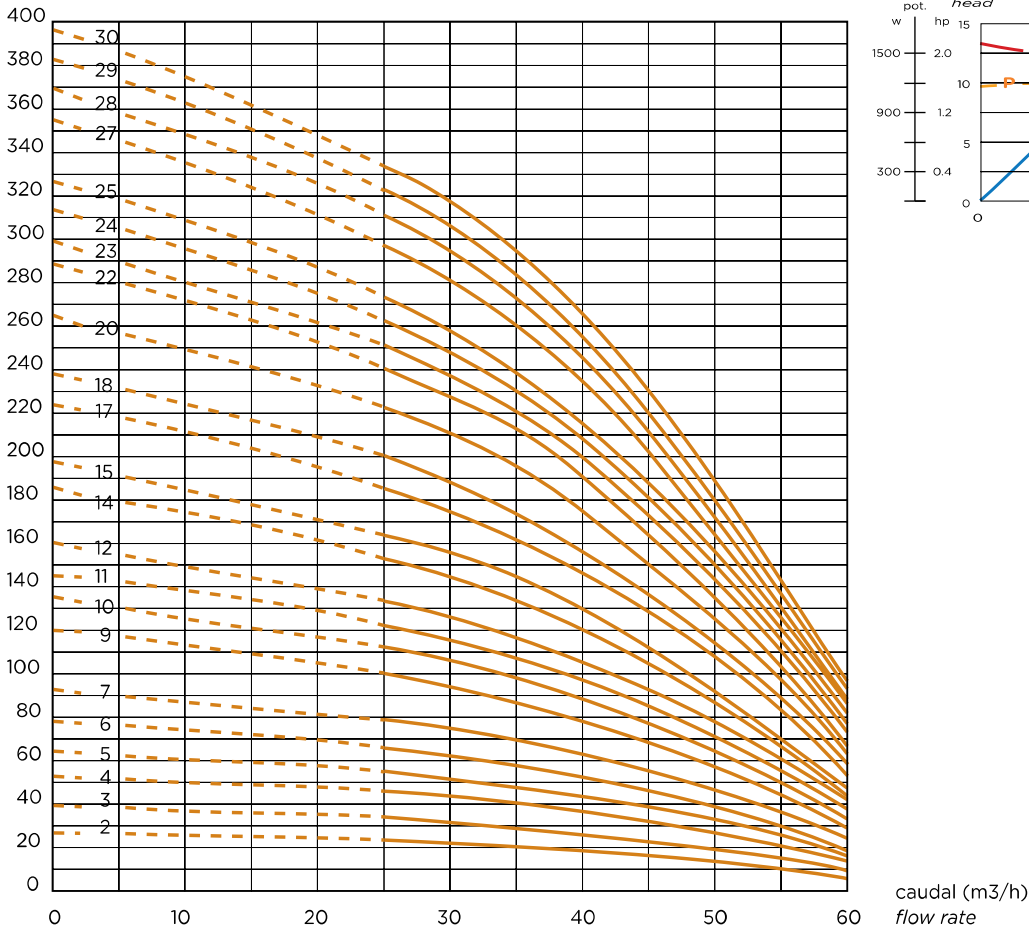

Pompe per applicazioni specifiche ad alto contenuto di sabbia. - Pumps for specific applications with high percentage of solids and sand
 Pompes pour applications spécifiques à haute teneur en solides et sable. - Bombas para aplicaciones específicas con un alto contenido de arena

| TIPO TYPE | MOTORE MOTOR MOTEUR | | Q m³/h l/min | PORTATA - DELIVERY - DEBIT - CAUDAL | | | | | | | | | | | B (mm) | peso weight pump END |
|--------------|---------------------------|------|--|-------------------------------------|-----|-----|-----|------|-----|-----|-----|----|------|---------|-----------|-------------------------------|
| | KW | CV | | 0 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | | | | |
| SX6 60/2 | 4 | 5,5 | altura manométrica (M) total head (m) | 26 | 22 | 21 | 20 | 19 | 17 | 12 | 10 | 6 | 488 | 9,8 kg | | |
| SX6 60/3 | 5,5 | 7,5 | | 39 | 33 | 31 | 30 | 27 | 24 | 20 | 15 | 10 | 598 | 12,1 kg | | |
| SX6 60/4 | 7,5 | 10 | | 53 | 45 | 43 | 40 | 38 | 31 | 26 | 20 | 15 | 708 | 14,4 kg | | |
| SX6 60/5 | 9,3 | 12,5 | | 64 | 55 | 52 | 49 | 45 | 40 | 32 | 25 | 18 | 818 | 16,7 kg | | |
| SX6 60/6 | 9,3 | 12,5 | | 78 | 65 | 62 | 59 | 54 | 47 | 40 | 30 | 20 | 928 | 19,1 kg | | |
| SX6 60/7 | 11 | 15 | | 92 | 79 | 76 | 70 | 64 | 56 | 47 | 37 | 25 | 1038 | 21,5 kg | | |
| SX6 60/9 | 15 | 20 | | 120 | 100 | 95 | 88 | 79,8 | 69 | 57 | 45 | 30 | 1258 | 26,1 kg | | |
| SX6 60/10 | 15 | 20 | | 135 | 112 | 107 | 100 | 90 | 77 | 65 | 50 | 33 | 1368 | 28,5 kg | | |
| SX6 60/11 | 18,5 | 25 | | 145 | 123 | 117 | 109 | 99 | 86 | 70 | 55 | 40 | 1478 | 30,8 kg | | |
| SX6 60/12 | 18,5 | 25 | | 160 | 135 | 127 | 118 | 107 | 94 | 80 | 61 | 43 | 1588 | 33,1 kg | | |
| SX6 60/14 | 22 | 30 | | 185 | 154 | 144 | 134 | 121 | 106 | 88 | 66 | 45 | 1808 | 37,7 kg | | |
| SX6 60/15 | 22 | 30 | | 198 | 164 | 156 | 144 | 130 | 111 | 91 | 70 | 49 | 1918 | 40,1 kg | | |
| SX6 60/17 | 30 | 40 | | 223 | 185 | 176 | 163 | 148 | 129 | 118 | 83 | 55 | 2138 | 44,7 kg | | |
| SX6 60/18 | 30 | 40 | | 238 | 200 | 190 | 175 | 158 | 137 | 114 | 89 | 59 | 2248 | 47,1 kg | | |
| SX6 60/20 | 30 | 40 | | 264 | 223 | 210 | 194 | 175 | 151 | 125 | 96 | 65 | 2468 | 51,8 kg | | |
| SX6 60/22 | 37 | 50 | | 289 | 241 | 229 | 203 | 190 | 163 | 133 | 101 | 69 | 2688 | 56,4 kg | | |
| SX6 60/23 | 37 | 50 | | 299 | 251 | 239 | 220 | 200 | 171 | 141 | 110 | 75 | 2798 | 58,8 kg | | |
| SX6 60/24 | 37 | 50 | | 313 | 263 | 248 | 230 | 210 | 180 | 150 | 115 | 79 | 2908 | 61,1 kg | | |
| SX6 60/25 | 37 | 50 | | 328 | 273 | 258 | 239 | 214 | 189 | 155 | 120 | 83 | 3018 | 63,5 kg | | |
| SX6 60/27 | 45 | 60 | | 355 | 298 | 280 | 260 | 232 | 201 | 165 | 125 | 89 | 3238 | 68,1 kg | | |
| SX6 60/28 | 45 | 60 | | 370 | 310 | 294 | 272 | 246 | 211 | 174 | 130 | 90 | 3348 | 70,5 kg | | |
| SX6 60/29 | 45 | 60 | | 383 | 324 | 308 | 284 | 255 | 220 | 180 | 138 | 95 | 3458 | 72,8 kg | | |
| SX6 60/30 | 45 | 60 | | 397 | 335 | 316 | 293 | 265 | 230 | 190 | 141 | 99 | 3568 | 75,1 kg | | |

P₂ Potenza nominale motore
 Rated motor power output
 Puissance nominale du moteur
 Potencia nominal del motor

H Prevalenza totale in m
 Total head in m
 Hauteur totale en m
 Altura total en m

Tolleranze secondo ISO 9906, allegato A.
 Tolerances according to ISO 9906, annex A.
 Tolérances selon ISO 9906, annexe A.
 Tolerancias según ISO 9906, anexo A.




Con riserva di modifiche
 Changes reserved
 Sous réserves de modifications
 Con reserva de modificaciones

SX6 80

POMPE SOMMERSE 6"
6" SUBMERSIBLE BOREHOLE PUMPS
POMPES IMMERGÉES 6"
BOMBAS SUMERGIBLES 6"

50 Hz - n ≈ 2900 rpm

alt. (m)
head

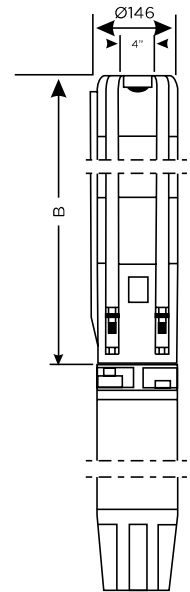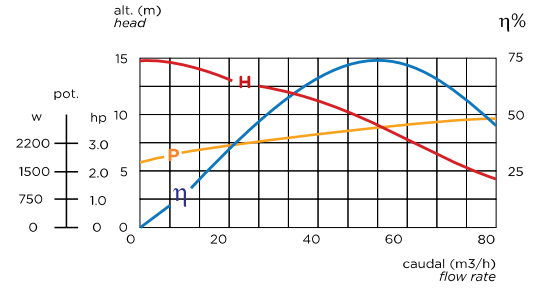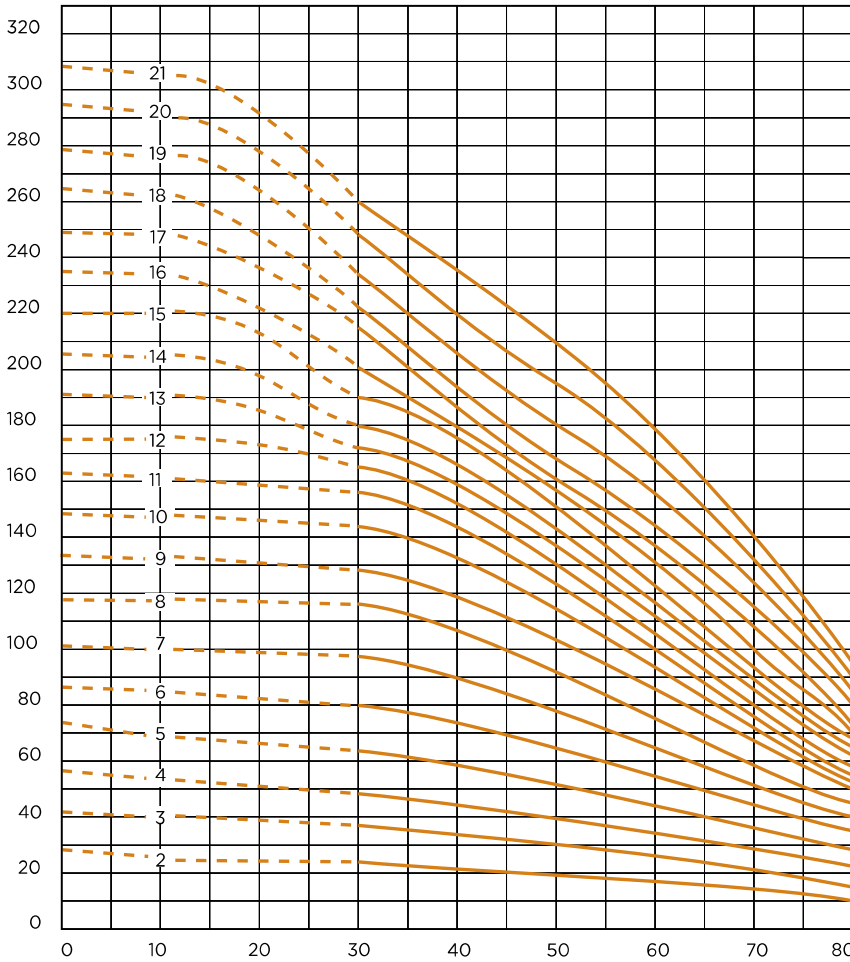

Pompe per applicazioni specifiche ad alto contenuto di sabbia. - Pumps for specific applications with high percentage of solids and sand
 Pompes pour applications spécifiques à haute teneur en solides et sable. - Bombas para aplicaciones específicas con un alto contenido de arena

| TIPO TYPE TYPE | MOTORE MOTOR MOTEUR | | Q m³/h l/min | PORTATA - DELIVERY - DEBIT - CAUDAL | | | | | | | | | | | | | | | | |
|----------------------|---------------------------|------|--|-------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|
| | KW | CV | | 0 | 5 | 10 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 65 | 70 | 75 | 80 |
| SX6 80/2 | 5,5 | 7,5 | altura manométrica (M) total head (m) | 28 | 28 | 28 | 28 | 27 | 26 | 24 | 23 | 21 | 20 | 19 | 18 | 16 | 14 | 12 | 10 | 7 |
| SX6 80/3 | 7,5 | 10 | | 43 | 43 | 43 | 42 | 41 | 39 | 37 | 35 | 33 | 30 | 28 | 26 | 24 | 22 | 18 | 15 | 11 |
| SX6 80/4 | 9,3 | 12,5 | | 57 | 57 | 57 | 57 | 55 | 53 | 50 | 47 | 44 | 41 | 39 | 36 | 34 | 28 | 25 | 21 | 15 |
| SX6 80/5 | 11 | 15 | | 74 | 74 | 73 | 72 | 70 | 67 | 63 | 59 | 56 | 52 | 49 | 46 | 42 | 38 | 32 | 26 | 19 |
| SX6 80/6 | 15 | 20 | | 87 | 87 | 87 | 85 | 83 | 80 | 75 | 70 | 66 | 62 | 58 | 55 | 51 | 45 | 38 | 31 | 23 |
| SX6 80/7 | 15 | 20 | | 101 | 101 | 101 | 99 | 97 | 92 | 86 | 81 | 76 | 72 | 68 | 63 | 58 | 52 | 44 | 36 | 27 |
| SX6 80/8 | 18,5 | 25 | | 117 | 117 | 117 | 115 | 112 | 107 | 101 | 94 | 89 | 84 | 80 | 75 | 69 | 62 | 53 | 43 | 33 |
| SX6 80/9 | 22 | 30 | | 132 | 132 | 132 | 131 | 127 | 121 | 114 | 106 | 100 | 95 | 84 | 84 | 78 | 69 | 59 | 48 | 36 |
| SX6 80/10 | 22 | 30 | | 148 | 148 | 147 | 145 | 142 | 135 | 126 | 118 | 111 | 105 | 100 | 93 | 86 | 76 | 65 | 53 | 39 |
| SX6 80/11 | 30 | 40 | | 162 | 162 | 161 | 160 | 156 | 148 | 139 | 130 | 123 | 116 | 110 | 104 | 96 | 86 | 74 | 60 | 46 |
| SX6 80/12 | 30 | 40 | | 175 | 175 | 174 | 173 | 168 | 161 | 151 | 142 | 133 | 125 | 119 | 113 | 105 | 95 | 81 | 66 | 51 |
| SX6 80/13 | 30 | 40 | | 191 | 191 | 191 | 189 | 184 | 176 | 165 | 155 | 146 | 138 | 131 | 124 | 115 | 103 | 88 | 72 | 56 |
| SX6 80/14 | 30 | 40 | | 205 | 205 | 205 | 203 | 198 | 190 | 178 | 167 | 157 | 149 | 141 | 133 | 124 | 112 | 97 | 79 | 60 |
| SX6 80/15 | 37 | 50 | | 220 | 219 | 219 | 216 | 211 | 202 | 189 | 177 | 167 | 158 | 150 | 141 | 131 | 118 | 102 | 83 | 63 |
| SX6 80/16 | 37 | 50 | | 234 | 234 | 233 | 230 | 224 | 214 | 200 | 187 | 177 | 167 | 158 | 149 | 139 | 125 | 107 | 87 | 66 |
| SX6 80/17 | 37 | 50 | | 249 | 248 | 247 | 244 | 238 | 227 | 213 | 199 | 188 | 177 | 168 | 158 | 147 | 132 | 113 | 92 | 70 |
| SX6 80/18 | 45 | 60 | | 264 | 263 | 261 | 259 | 253 | 241 | 225 | 211 | 199 | 188 | 177 | 167 | 154 | 139 | 119 | 97 | 73 |
| SX6 80/19 | 45 | 60 | | 278 | 277 | 275 | 272 | 265 | 253 | 237 | 222 | 209 | 198 | 187 | 176 | 163 | 146 | 125 | 101 | 76 |
| SX6 80/20 | 45 | 60 | | 294 | 292 | 290 | 287 | 280 | 268 | 251 | 234 | 221 | 209 | 199 | 187 | 173 | 155 | 133 | 108 | 82 |
| SX6 80/21 | 45 | 60 | | 307 | 306 | 304 | 301 | 295 | 282 | 263 | 245 | 231 | 219 | 208 | 195 | 178 | 160 | 138 | 113 | 85 |

| B | peso weight pump END |
|------|----------------------------|
| 526 | 10,1 |
| 651 | 12,7 |
| 776 | 15,4 |
| 901 | 18,0 |
| 1026 | 20,6 |
| 1151 | 23,2 |
| 1276 | 25,8 |
| 1401 | 28,4 |
| 1345 | 31,1 |
| 1526 | 33,7 |
| 1651 | 36,3 |
| 1776 | 38,9 |
| 1901 | 41,5 |
| 2026 | 44,2 |
| 2151 | 46,8 |
| 2276 | 49,4 |
| 2401 | 52,0 |
| 2651 | 54,6 |
| 2776 | 57,3 |
| 2901 | 59,9 |

P₂ Potenza nominale motore
 Rated motor power output
 Puissance nominale du moteur
 Potencia nominal del motor

H Prevalenza totale in m
 Total head in m
 Hauteur totale en m
 Altura total en m

Tolleranze secondo ISO 9906, allegato A.
 Tolerances according to ISO 9906, annex A.
 Tolérances selon ISO 9906, annexe A.
 Tolerancias según ISO 9906, anexo A.

Con riserva di modifiche
 Changes reserved
 Sous réserves de modifications
 Con reserva de modificaciones